

Viscom Auxiliary Modules

Systematic Fault Analysis to Ensure Process Monitoring



FEATURES

Verification and Classification Station S

Effective Fault Processing without Halting AOI

The classification station S6002 allows defect images and features to be displayed. With it, good and bad can be separated; at the same time, it can be used to evaluate inspection data.


The classification station connects to the inspection system (AOI/AXI) through a network. Inspection results are immediately transferred from the inspection system to the classification computer, where they can be easily and conveniently processed with the **Viscom HARAN software**.

These results are displayed on a monitor screen as image data, as well as superimposed onto an overview image of the printed circuit board with reference to specific position. The **color overview image**, displayed by the Viscom system in true-to-life photo quality, greatly eases orientation. With this image, 95 % of defects can be classified without reference to the actual board. And in the **ValidCompareMode**, a previously validated good image is offered for comparison to each defect image recognized by the AOI. This good/bad image comparison simplifies defect evaluation considerably, especially for the semi-skilled operator. The comparison image can be quickly and easily uploaded from a good PCB (Golden Board) at the AOI.

Essential inspection features can be displayed at the classification station as the program runs. After defects are classified by the operator, inspection data can be routed to an SPC sever (Viscom's Statistical Process Control), which offers comprehensive **statistical evaluation of the printed circuit board inspection**. An MES interface allows data transfer to a traceability system; the resultant statistical diagrams are accessible online to facilitate rapid intervention into any variations in the production process. Documentation of classification results is also accommodated – when required, with recorded images as well.



Classification station with separate handling module

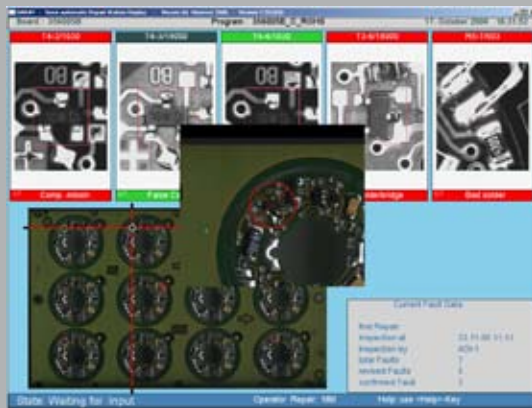

Overview photograph with confirmed inspection defects



Overview photograph and close-up of single inspection defects



Several AOI/AXI systems can be linked to one classification station, or vice versa: analysis results from one AOI/AXI system can be distributed to several classification stations. Thus, this Viscom module attains the **greatest deployment flexibility while maintaining simple operability**.

A further option is **cascading inspection results** to both an inline classification station and a downstream repair station. In this configuration, inspection results are validated and defects requiring repair transferred to the repair station.

To ease defect assessment and prevent faulty classification due to human error, the system furnishes **additional reference images** taken from an angled view. This unique feature permits all defect images to be readily classified with the assistance of comprehensive image material.

Comfortable verification and repair station

Realistic, colored overview image

Statistical analysis in diagram form

Directly linked with the VPC server

Technical Specifications – S6002

Processor	PENTIUM®
Hard disk driver	80 GB
Main memory	1 GB
Operating system	Windows®
User interface	MFC®
Monitor	TFT
Special equipment	Detached keyboard
Interfaces	100 MB/s LAN
System dimensions	200 x 600 x 600 mm (7.9" x 23.6" x 23.6") (W x D x H)
Voltage	230V / 50 (60) Hz, 200 Watt


VPC-Software


Wide Range of Filter Functions for Statistical Evaluations

The VPC software is employed where **processes have to be controlled by means of short regulating loops**. The software continuously accepts the inspection data which has been processed by the Viscom inspection systems and displays deviation tendencies in paste print, chip placement, soldering or bonding. It is thus possible to detect changes in the manufacturing process in good time.

This is presented in the form of **configurable diagrams** which can be accessed by the VPC server from different locations via the network. In addition to this, it is **possible to define the process intervention thresholds**, so that the process is interrupted if a specific defect rate is exceeded. All analyses can be output as either event-oriented or characteristic-oriented and displayed with the help of a variety of diagram types. In addition, there is a very interesting feature: the placement data of every defective component is also available in a corresponding data base.

Viscom VPC software is **fully network-capable**, i.e. data may be analysed and exported by any number of machines. It is **barcode-controlled** and regulates all data required for evaluation. The VPC software permits access to specific data, such as that assigned to a certain dispenser or a particularly critical type of component. Operation is simple and the software is compatible with all Viscom AOI/AXI systems. It brings a new concept for defect definition and clearly **cuts down evaluation times**. The advantages of these features are particularly the **avoidance of series defects and the documentation of process results**.

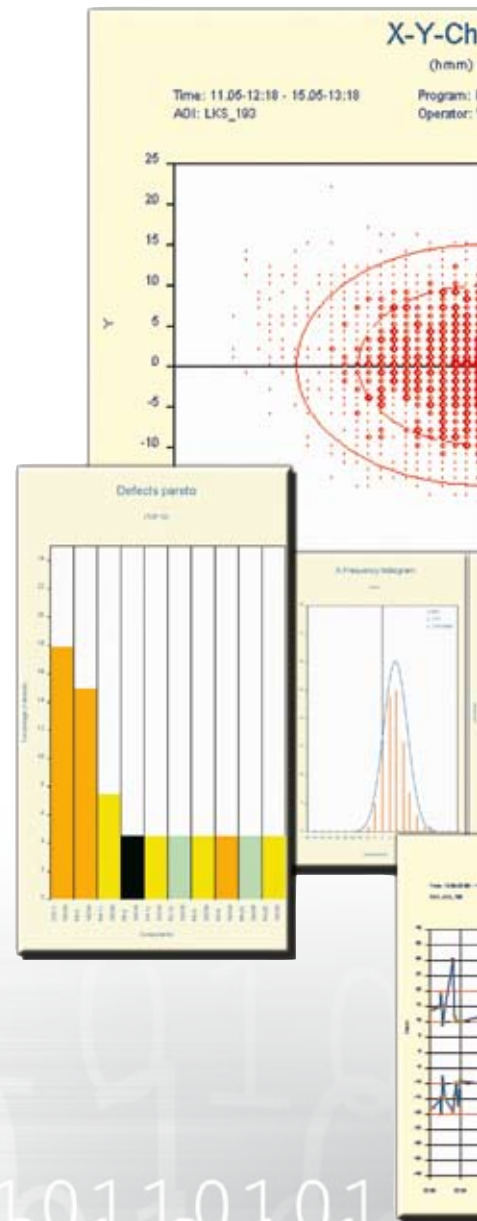

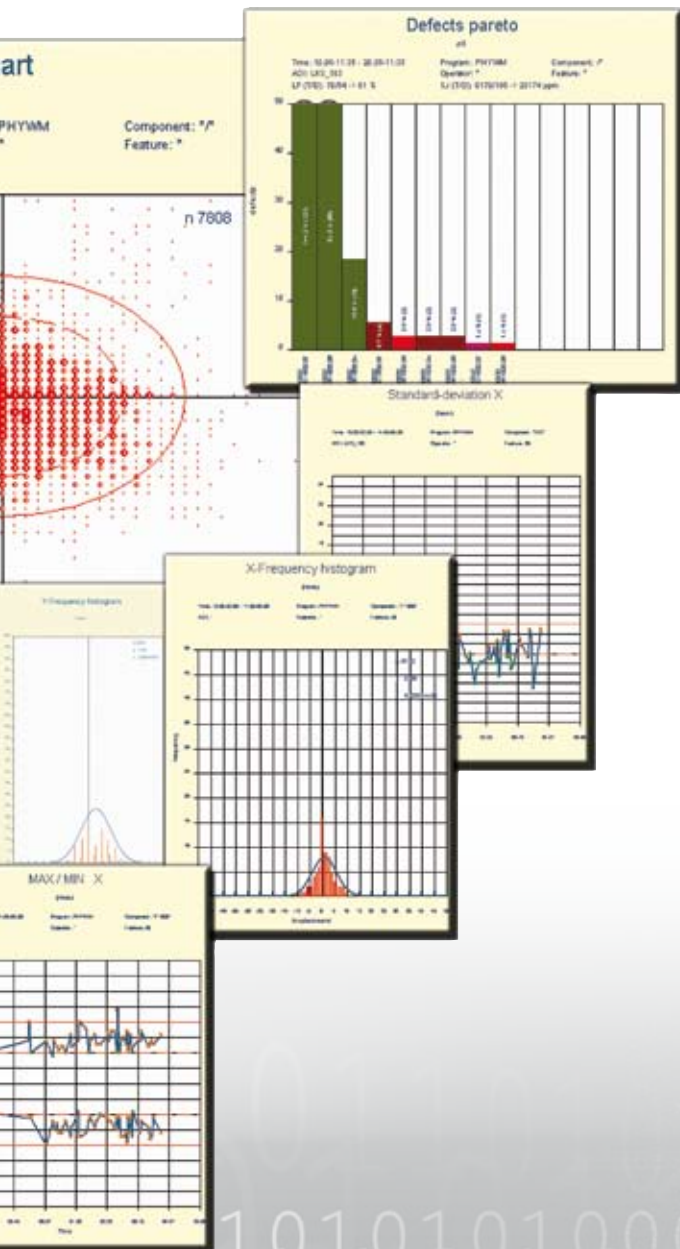

In-line trend analysis

Display of quality improvement over a period

Documentation of process results

Recognition of defect groupings

Avoidance of series defects

Definition of process intervention thresholds

Closed-Loop-Ready

Programming Station PST34

Time-Optimized Creation and Maintenance of Inspection Schedules


The off-line programming station makes it possible to **create and optimize the inspection programs** without having to use the inspection system. CAD data are verified, component types assigned and the program is created with the help of diagram.

The **user interface Viscom EasyPro3D** is based on a model-oriented component library and intuitive programming. The operator virtually sees the component before his eyes, to make programming easy and convenient. The essential functions of EasyPro3D are a user-friendly user interface, **intelligent data import** and the **IPC-compliant Viscom inspection library**, which enables **inspection plan creation in only three steps**.

The user is also **guided through the „dialog“**, i.e. whenever help is required, by so-called „wizards“. The entire program is split up into three distinct wizards. In the final step, inspection patterns are assigned from the library using the so-called „drag and drop“ technique.

One of the central features of this software is the **integrated defect verification TrustedChange, which reduces pseudo defect incidence and verifies error escape**. It is used for checking against stored bad patterns – e.g. from the repair station and blank, soldered printed circuit boards. Whenever a program modification is carried out to reduce the incidence of pseudo defects, a check is also carried out to ensure that previously detected real defects which were validated by the repair station are still being detected. With the integrated defect **verification TrustedChange**, the quality of the inspection programs can be ensured for own production, as well as audits. It is of course **possible to co-ordinate several inspection systems from a single programming station**, as well as operate them with programs.



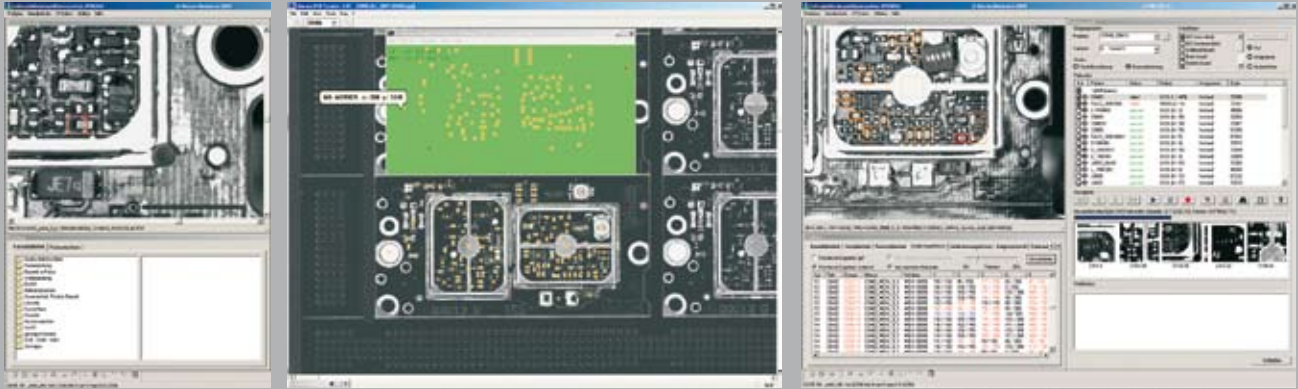

Different analysis windows using Viscom EasyPro3D



Comfortable User Interface – Viscom EasyPro3D

Program creation and maintenance

Data import from the VPC software makes it possible to take into account fault statistics pertaining to the structural shape of the components

Integrated defect verification to ensure the effectiveness of zero defect strategy

**Just a few clearly-structured views:
Programming mode and inspection sample creation**

So-called „wizards“ guide the user through the dialog

Technical Specifications – PST34

Processor	PENTIUM®
Hard disk driver	80 GB
Main memory	1 GB
Operating system	Windows®
User interface	MFC®
Monitor	TFT
Special equipment	Detached keyboard
Interfaces	100 MB/s LAN
System dimensions	200 x 600 x 600 mm (7.9" x 23.6" x 23.6") (W x D x H)
Voltage	230V / 50 (60) Hz, 200 Watt



Headquarters:
Viscom AG
Carl-Buderus-Str. 9 - 15 · 30455 Hanover · Germany
Tel.: +49 511 94996-0 · Fax: +49 511 94996-900
info@viscom.com · www.viscom.com

Visit our website to find international subsidiaries and representatives in Europe, USA and Asia:

www.viscom.com